



CNX SERIES HYDRAULIC TORQUE TOOL



HexForce CNX is built to exceed the expectations of professionals seeking unmatched speed, durability, reliability, and user-friendliness in their bolting tasks. Constructed with high-strength aluminium. The HexForce CNX boasts exceptional strength and resilience. We prioritise operator comfort and ease of use with an ergonomic design that minimises fatigue and strain, while intuitive controls ensure smooth operation and error-free tightening.

The HexForce CNX series offers a versatile range of torque capacities and square drive sizes, effortlessly adapting to your specific needs.

High Strength Aerospace Aluminium Material

Ensures exceptional durability and lightweight handling.

One-Way Ratcheting Mechanism

Provides efficient fastening and accuracy.


Ratchet Freeing Mechanism

Allows for smooth and precise bolt loosening.


Multi-Axis 360°-180° Swivel

Offers unmatched versatility and access in confined spaces.

TORQUE RANGE 271-52500 FT.LBS.
200-71180 NM



TORQUE TOOLS

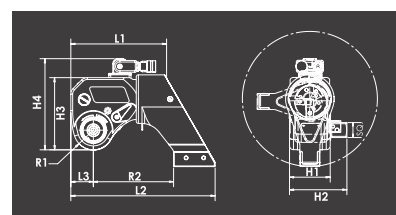

| MODEL | L1 (inch/ mm) | L2 (inch/ mm) | L3 (inch/ mm) | H1 (inch/ mm) | H2 (inch/ mm) | H3 (inch/ mm) | H4 (inch/ mm) | R1 (inch/ mm) | R2 (inch/ mm) | DRIVE SIZE | WEIGHT (lbs/ kg) | TORQUE (ft.lbs./Nm) | |
|--------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------|------------------------|------------------------|----------------|
| | | | | | | | | | | | | MIN. | MAX. |
| CNX-02 | 4.9 124 | 7.3 186.5 | 1.1 28.8 | 2.0 51.6 | 2.9 72.6 | 3.7 93.3 | 4.9 124.4 | 1.0 25 | 4.1 104.3 | 3/4" | 4.41 2 | 200 271 | 1339 1816 |
| CNX-04 | 6.4 161.9 | 9.7 245.5 | 1.5 39.1 | 2.7 68.8 | 3.7 94.4 | 4.8 121.2 | 6.4 162.1 | 1.3 33.3 | 5.3 135.2 | 1" | 10.36 4.7 | 479 650 | 3228 4377 |
| CNX-07 | 7.7 195.8 | 11.7 296.1 | 1.9 48.5 | 3.3 82.6 | 5.0 126.9 | 5.7 143.7 | 7.3 185.1 | 1.6 39.9 | 6.4 161.6 | 1 1/2" | 18.08 8.2 | 834 1131 | 5587 7575 |
| CNX-11 | 7.7 195.6 | 12.6 319.3 | - | 3.6" 90.7 | 5.1 129.3 | 6.5 165.1 | 8.5 215.9 | 1.7 44.7 | 6.9 176.8 | 1 1/2" | 24.91 11.3 | 1200 1627 | 8000 10846 |
| CNX-15 | 9.6 243 | 14.4 366.2 | 2.3 57.2 | 4.1 103.3 | 5.7 145.7 | 7.2 183.2 | 9.1 231.4 | 2.0 49.8 | 8.0 203.5 | 1 1/2" | 33.07 15 | 1754 2378 | 11513 15610 |
| CNX-30 | 11.4 289.8 | 17.3 438.7 | 2.7 68.8 | 4.7 120.1 | 7.1 180.3 | 8.8 223 | 10.2 260.1 | 2.4 59.9 | 9.6 243.3 | 2 1/2" | 43.43 19.7 | 2958 4011 | 19748 26775 |
| CNX-35 | 11.8 299.7 | 18.5 470.4 | - | 5.2 133.3 | 7.5 190 | 9.6 243.8 | 11.5 292.1 | 2.6 66.0 | 10.2 260.3 | 2 1/2" | 68.56 31.1 | 3883 5265 | 25890 35102 |
| CNX-50 | 14.0 356.3 | 21.2 539.2 | 3.3 84.6 | 5.8 147.8 | 8.3 211.3 | 10.8 274.1 | 12.4 313.9 | 2.9 73.7 | 11.7 298.2 | 2 1/2" | 77.60 35.2 | 5397 7317 | 37078 50271 |
| CNX-72 | 15.5 393.7 | 23 584 | 3.7 94 | 6.6 166.9 | 9.4 237.7 | 11.0 279.4 | 12.8 325.1 | 3.3 82.6 | 12.8 325.6 | 2 1/2" | 124.34 56.4 | 7875 10677 | 52500 71180 |

*Minimum and maximum torque output data may vary.



ADVANCED BOLTING SOLUTIONS PVT. LTD.

HO: "ABS House", Plot No. W-116 (A),
T.T.C. Industrial Area, MIDC Khairane,
Navi Mumbai - 400 710.

Phone: +91 3526 4444
E-mail: marketing@absgroup.in
Web: www.absgroup.in