


HF-FS-25EMK



HF-FS-15EK

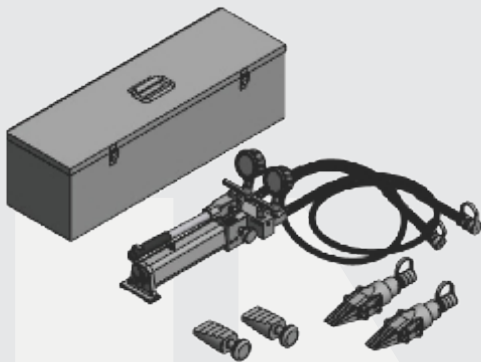

ABS Flange spreaders utilize a wedge mechanism inserted between the flanges. As the wedge is forced open, it applies controlled pressure to the flanges, separating them without damaging the components.

This allows for:

- Safe and controlled disassembly of flange connections, minimizing the risk of injury or equipment damage.
- Faster and more efficient separation compared to manual methods.
- Access to components behind the flanges for maintenance or inspection

MODEL	CAPACITY (TON)*	SPREAD (mm)		STROKE (mm)	WEIGHT (Kg)
		MIN.	MAX.		
HF-FS-15EK	15	5	15	25	3.3
HF-FS-15EMK	15 X 2	5	15	25	3.3
HF-FS-25EK	25	7	23	65	7.8
HF-FS-25EMK	25 X 2	7	23	65	7.8

ADVANCED BOLTING SOLUTIONS PVT. LTD.

ABS House, W-116 (A), T.T.C. Industrial Area,
MIDC Khairane, Navi Mumbai - 400 710.

Phone: +91 82828 29795
Email: marketing@absgroup.in

www.absgroup.in

