


HYDRAULIC TORQUE TOOL



TORQUE RANGE

271 - 120000 NM
200 - 88510 FT. LBS.

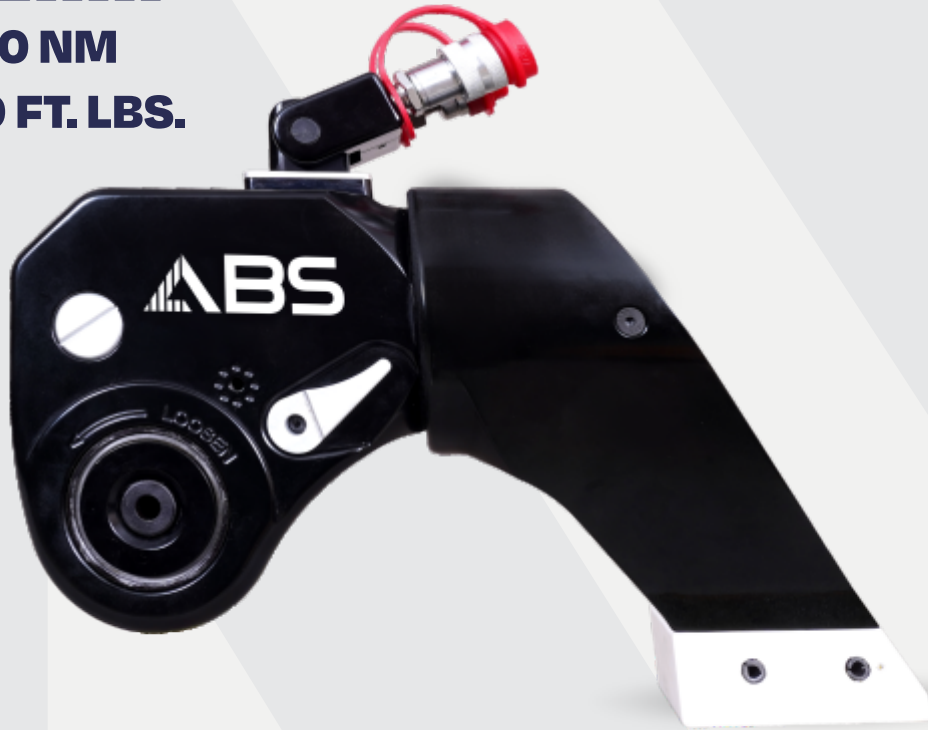

CNX SERIES

ABS CNX is built to exceed the expectations of professionals seeking unmatched speed, durability, reliability, and user-friendliness in their bolting tasks. Constructed with high-strength aluminium. The ABS CNX boasts exceptional strength and resilience. We prioritise operator comfort and ease of use with an ergonomic design that minimises fatigue and strain, while intuitive controls ensure smooth operation and error-free tightening.

The ABS CNX series offers a versatile range of torque capacities and square drive sizes, effortlessly adapting to your specific needs.

High Strength Aerospace Aluminium Material

Ensures exceptional durability and lightweight handling.

One-Way Ratcheting Mechanism

Provides efficient fastening and accuracy.

Ratchet Freeing Mechanism

Allows for smooth and precise bolt loosening.

Multi-Axis 360°-180° Swivel

Offers unmatched versatility and access in confined spaces.




ADVANCED BOLTING SOLUTIONS PVT. LTD.

ABS House, W-116 (A), T.T.C. Industrial Area,
MIDC Khairane, Navi Mumbai - 400 710.

Phone: +91 82828 29795
Email: marketing@absgroup.in

www.absgroup.in



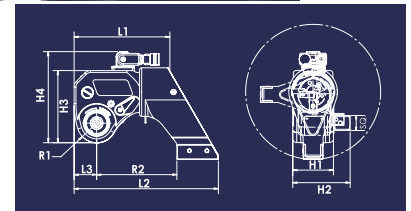

MODEL	L1 (inch/ mm)	L2 (inch/ mm)	L3 (inch/ mm)	H1 (inch/ mm)	H2 (inch/ mm)	H3 (inch/ mm)	H4 (inch/ mm)	R1 (inch/ mm)	R2 (inch/ mm)	DRIVE SIZE	WEIGHT (lbs/ kg)	TORQUE (ft.lbs./Nm)	
												MIN.	MAX.
CNX-01	3.94 100.3	5.96 151.6	0.9 23	1.62 41.2	2.47 62.9	2.95 75	4.3 109.4	0.8 20.5	3.30 84	3/4"	1.3 2.8	118 160	822 1114
CNX-02	4.9 124	7.3 186.5	1.1 28.8	2.0 51.6	2.9 72.6	3.7 93.3	4.9 124.4	1.0 25	4.1 104.3	3/4"	4.41 2	200 271	1339 1816
CNX-04	6.4 161.9	9.7 245.5	1.5 39.1	2.7 68.8	3.7 94.4	4.8 121.2	6.4 162.1	1.3 33.3	5.3 135.2	1"	10.36 4.7	479 650	3228 4377
CNX-07	7.7 195.8	11.7 296.1	1.9 48.5	3.3 82.6	5.0 126.9	5.7 143.7	7.3 185.1	1.6 39.9	6.4 161.6	1-1/2"	18.08 8.2	834 1131	5587 7575
CNX-11	7.7 195.6	12.6 319.3	2.2 55.2	3.6" 90.7	5.1 129.3	6.5 165.1	8.5 215.9	1.7 44.7	6.9 176.8	1-1/2"	24.91 11.3	1200 1627	8000 10846
CNX-15	9.6 243	14.4 366.2	2.3 57.2	4.1 103.3	5.7 145.7	7.2 183.2	9.1 231.4	2.0 49.8	8.0 203.5	1-1/2"	33.07 15	1754 2378	11513 15610
CNX-20	10.54 267.8	15.5 392.9	2.5 63.3	4.4 113	7.1 180.6	8.1 206	10.2 258.7	2.2 55.5	8.8 223.8	2-1/2"	44.53 20.2	2012 2728	14082 19093
CNX-30	11.4 289.8	17.3 438.7	2.7 68.8	4.7 120.1	7.1 180.3	8.8 223	10.2 260.1	2.4 59.9	9.6 243.3	2-1/2"	43.43 19.7	2958 4011	19748 26775
CNX-35	11.8 299.7	18.5 470.4	3.1 78.4	5.2 133.3	7.5 190	9.6 243.8	11.5 292.1	2.6 66.0	10.2 260.3	2-1/2"	68.56 31.1	3883 5265	25890 35102
CNX-50	14.0 356.3	21.2 539.2	3.3 84.6	5.8 147.8	8.3 211.3	10.8 274.1	12.4 313.9	2.9 73.7	11.7 298.2	2-1/2"	77.60 35.2	5397 7317	37078 50271
CNX-72	15.5 393.7	23 584	3.7 94	6.6 166.9	9.4 237.7	11.0 279.4	12.8 325.1	3.3 82.6	12.8 325.6	2-1/2"	124.34 56.4	7875 10677	59995 81338
CNX-120	20.0 509	19.5 496	5.2 132	7.5 190	9.7 247	15.0 383	16.8 429	4.7 119	14.8 377	3-1/2"	280.5 127.5	11965 16213	88510 120000

*Minimum and maximum torque output data may vary. Dimensions are subject to change without prior notice based on applications.
Note: Product image shown is for illustration purposes only; actual product may vary upon delivery.

ADVANCED BOLTING SOLUTIONS PVT. LTD.

ABS House, W-116 (A), T.T.C. Industrial Area,
MIDC Khairane, Navi Mumbai - 400 710.

Phone: +91 82828 29795
Email: marketing@absgroup.in

www.absgroup.in

