STEEL CYLINDERS

NDAH SERIES

CAPACITY: 30 - 100 Ton

STROKE: 76 - 257 mm

Double Action, Hollow Plunger Cylinders

MAX. WORKING PRESSURE: 700 bar/ 10,000 psi

FEATURES

- All cylinders are hollow and double action .
- Piston hard chromed.
- Cylinders inside roll-polished.
- Cylinders outside blasted with black nitriding finish.

Hand / Foot Pumps

Power Pumps

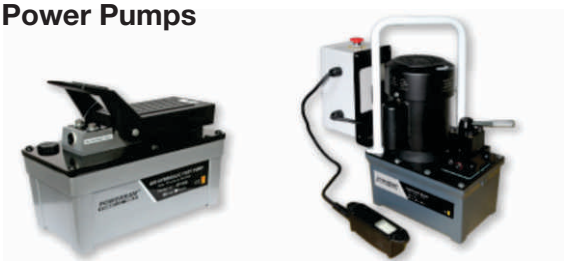

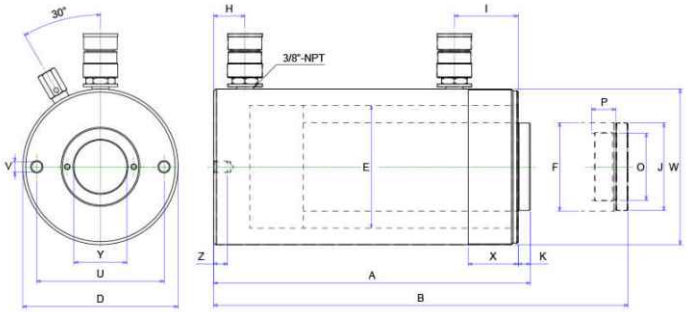

SPECIFICATIONS

Model No.	Capacity (ton) Push	Capacity (ton) Pull	Stroke (mm)	Cylinder Effective Area (cm^2)	Oil Capacity (cm^3) Push	Oil Capacity (cm^3) Pull	A Height (mm) Retracted	B Height (mm) Extended	D ø mm	E ø mm	F ø mm	H mm	I mm	J ø mm	K mm	O ø UN	P mm	U mm	V ø UNC	Z mm	W ø UN	X mm	Y Center Hole ø mm	Weight (kgs)
NDAH307	30	21	178	47.8	849	541	330	508	117	90	65	21.5	60.5	60	0.5	1⅞"-16	25	92	⅜"-16	14	4½"-12	42	34	22
NDAH3010			257	47.8	1226	782	431	688							10									27
NDAH603			89	89.6	797	526	247.5	336.5																28
NDAH606	60	41	165	89.6	1477	975	323.5	488.5	158.6	125	90	32	65	89	12.5	2¾"-16	25	130	½"-13	14	6¼"-12	50	54	35
NDAH6010			257	89.6	2300	1518	437.5	694.5																45
NDAH1003			76	143	1086	692	254	330																52
NDAH1006	100	64	152	143	2172	1384	325	477	213	165	125	38	82	125	12	4"-16	30	178	⅝"-11	19	8⅜"-12	60	79	65
NDAH10010			256	143	3656	2331	462	718																88